



WaveGuide 5 Onboard

Our motion compensated wave radar designed for 'on board' use.
It accurately measures wave height, wave period and draught.
No water contact, no maintenance and no (re-) calibration. So no hassle.

This accurate wave monitoring system is an easy to use, reliable and robust device to measure vessel draft level, wave height and wave period. The sensor

is capable of maintaining high level of precision and accuracy in harsh environmental conditions and is particularly suited to maritime use.

Features and benefits

- Highly accurate
- Maintenance free
- Plug and play
- Severe conditions proof
- Optional ATEX / IECEx

- Vertical motion compensation
- Measuring at 10 Hz
- 0 - 60 m wave height
- 1 - 100 s range wave period
- Network connected
- Up to 5 years of internal data storage



The Onboard wave radar, mostly installed on the bow of the ship, measures the distance to the water surface. The distances measured have to be compensated for the vertical motions of the radar itself. Hence, a motion sensor is incorporated into the radar unit. The WaveGuide Onboard measures the waves the ship actually has to endure. The radar measures the distance to the water surface

10 times per second. In all wind and wave conditions the accuracy for water level is proven to be below 1 cm. The radar itself facilitates data acquisition, data processing, data presentation and remote service. Data will be internally stored on the device and distributed over the network. Any device connected to the (private) network can access the web-based user interface.

We are Radac
Technology leader in measuring waves by radar



Since 1996, our Dutch company develops unique sensors to monitor the ocean surface. Without water contact, moving parts or need for calibration, the wave radar is a maintenance free device. This makes us, truly an Opex free, high value

system provider. We are proud that our professional systems are trusted across the industry. Our main clients include oil companies, offshore wind farm operators, port operators and shipping companies.

WaveGuide 5 Onboard


WG5 series

SPECIFICATIONS

Heave	Range: 2 - 75 m to surface
	Accuracy: ± 1 cm ¹⁾
	Frequency: 10 Hz
Water level	Accuracy: ± 1 cm ²⁾³⁾
	Processing: 10 min average (optional 1 min and 5 min)
	Interval: 1 min
Wave height	Range: 0 - 60 m
	Accuracy: ± 3 cm ³⁾
	Processing: SWAP ⁴⁾ (per 20 min data block)
	Interval: 1 min
Wave period ⁵⁾	Range: 1 - 100 s
	Accuracy: ± 50 ms ³⁾
	Processing: SWAP ⁴⁾ (per 20 min data block)
	Interval: 1 min


COMPACT VERSION: WG5-OB-CP

Mechanical	Dimensions: \varnothing 265 x 245 mm
	Weight: 12.5 kg
	Material: Stainless steel, AISI 316L
Electrical	Power: 24 - 65 VDC, 65 - 240 Vac, 8 W
	Frequency: 10 GHz (X-band)
	Modulation: Triangular FMCW
	Emission: 0.1 mW max. (Far below acceptable limits for exposure to the human body)
Environmental	Temperature: -40 °C to 65 °C
	Humidity: 0 - 100 %
	Ingress Protection: IP67
Motion sensor	Range: 8 g
	Nonlinearity 0,05 % FS
Communication	Network: 1x Ethernet
	Data storage: SD 32 Gb
	Optional: External converter to RS232 or RS422 or RS485



EXPLOSION PROOF VERSION: WG5-OB-EX

Mechanical	Dimensions: 217 x 319 x 379 mm (d x w x h)
	Weight: 14.4 kg (excl. antenna 2.8 kg)
	Material: Chromatized aluminum
Electrical	Power: 24 - 65 VDC, 65 - 240 Vac, 8 W
	Frequency: 10 GHz (X-band)
	Modulation: Triangular FMCW 256 MHz
	Emission: 0.1 mWatt max. (Far below acceptable limits for exposure of the human body)
Environmental	Temperature: -40 °C to 65 °C
	Humidity: 0 - 100 %
	Ingress Protection: IP67
	Safety: ATEX, II 1/2 G Ex d [ia Ga] IIB T6 Ga/Gb
Communication	Network: 1x Ethernet
	Data storage: SD 32 Gb
	Optional: External converter to RS232 or RS422 or RS485

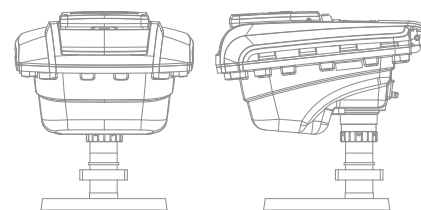

1) Valid for a still water surface. 2) For a water surface with waves. 3) The accuracy of the wave parameters is not limited by the radar sensor, yet it is defined by the stochastic nature of sea-surface measurements. 4) SWAP is the Standard Wave Analysis Program, in accordance with the applied standards of the Dutch Ministry of Infrastructure and Environment and of the International Association of Oil and Gas producers. 5) The wave period is not compensated for the horizontal motion. Hence, for a moving vessel, the sensor measures the wave period as encountered by the vessel.